

Framed Doors - High Pressure

CONTACT


Office: 888.973.7600

1100 Ashwood Drive
Suite 1102
Canonsburg, PA 15317
Can

www.clward.com


Detail

- High density fiberglass 1" insulation with UL classification: FHC25/50
- Consist of two, 24 gauge galvanized steel panels, mechanically locked together
- Tested to 10" Positive/Negative pressure with minimal leakage
- High density, closed cell gasket, which has a service range of -20° to 100°, is bonded to both the inside and outside of the dovetail frame
- Dovetail Frames 6x6 to 12x12 are manufactured from 24 gauge Galvanized steel. Dovetail frames 14x14 to 24x24 are manufactured from 22 gauge galvanized steel
- All frames are manufactured with spotwelds at each corner for increased strength
- Cams are manufactured from 16 gauge galvanized steel and secured to the door with a rivet
- Latches are manufactured from 20 gauge galvanized steel and secured to the frame with two spot welds
- Available is galvanized, galvanized, stainless 304, stainless 316 and aluminized



Profile

Hinged Doors - 6" x 6" through 14" x 14" have one CAM lock
16" x 16" through 24" x 24" have two CAM locks

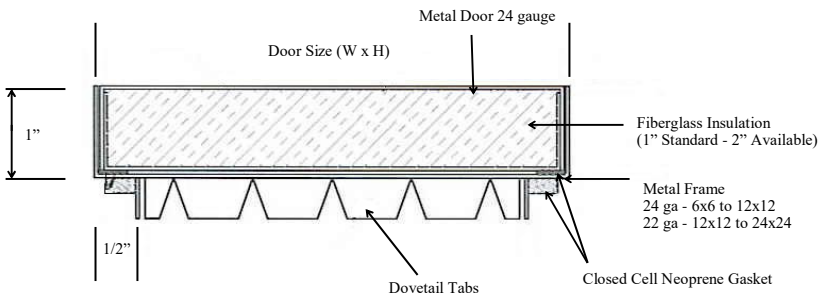

Packaging

Item Code	Door Size	# of Cams	Packaging	Weight
FDHPC6GA	6" x 6"	4	20	31 lbs
FDHPC8GA	8" x 8"	8	20	45 lbs
FDHPC10GA	10" x 10"	8	10	30 lbs
FDHPC12GA	12" x 12"	8	10	39 lbs
FDHPC14GA	14" x 14"	8	10	50 lbs
FDHPC16GA	16" x 16"	8	5	30 lbs
FDHPC18GA	18" x 18"	8	5	38 lbs
FDHPC20GA	20" x 20"	8	5	45 lbs
FDHPC24GA	24" x 24"	8	5	60 lbs