

Access Door - LHTGDD Door

CONTACT

Office: 888.973.7600

1100 Ashwood Drive
Suite 1102
Canonsburg, PA 15317


www.clward.com

Detail

- Quick installation
- Fabricated to accept 3 layers of grease duct wrap.
- No tools required to open and close the door.
- Access door outer cover is fabricated from 16 gauge.
- Available in Stainless Steel (Access Door & Outer Plate)
- Threaded Rod Conduit enables clean and easy installation.
- CL WARD High Temp Access Door has 2,300°F ceramic rope gasket.
- Meets NFPA 96
- The LHTGDD access doors have also been qualified for use with FyreWrap® fire rated grease duct enclosure systems. Listed by Intertek Testing Services; approved for FyreWrap Elite 1.5 Duct Insulation systems tested per ASTM E-2336 and UL 1978.



Profile

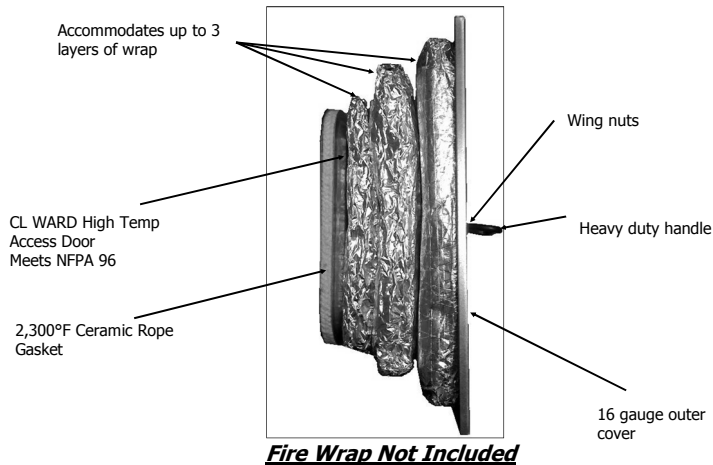

Packaging

Item Code	Product Description	Packaging	Weight
LHTGDD106GA16	10x6 Grease Duct Access Door w/Outer Plate	Per Order	8 lbs/door
LHTGDD128GA16	12x8 Grease Duct Access Door w/Outer Plate	Per Order	10 lbs/door
LHTGDD1612GA16	16x12 Grease Duct Access Door w/Outer Plate	Per Order	12 lbs/door

S4 = SS 304