

# LADUL - LRADUL ACCESS DOORS

## Detail

UL RATED Access Door for grease duct or high temperature applications.

- UL 1978 Listed
- Meets NFPA 96 Standards
- No welding required
- Air tight
- Grease tight
- Can accommodate all types of duct wrap insulation
- Quick and easy to install
- Available in 10x6, 12x8 and 16x12
- Consists of two layers of 11 gauge steel.
- Available for both flat and round duct work
- High temp ceramic board is rated to 2,300°F
- Self adhesive template provided for installation cut out
- Available in stainless steel (for stainless steel duct)
- Extension/Insulation kits available



LADUL - Flat UL Door



LRADUL - Round UL Door


## CONTACT

Office: 888.973.7600

1100 Ashwood Drive  
Suite 1102  
Canonsburg, PA 15317

[www.clward.com](http://www.clward.com)

## Profile

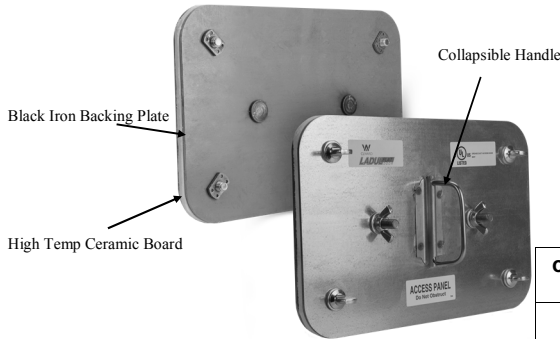

Opening Size (Order Size)	Door Size	Minimum Duct Height	Outer Plate Size (Kit)
10" x 6"	12" x 8"	12"	16" x 12"
12" x 8"	14" x 10"	14"	18" x 14"
16" x 12"	18" x 14"	18"	22" x 18"

## Packaging

Item Code	Item Description	Packaging	Weight
LADUL106GABI	UL Rated Flat Access Door 10x6	5 Doors/Box	39 lbs/box
LADUL128GABI	UL Rated Flat Access Door 12x8	5 Doors/Box	55.9 lbs/box
LADUL1612GABI	UL Rated Flat Access Door 16x12	2 Doors/Box	25 lbs/box
LRADUL106xGABI	UL Rated Round Access Door 10x6	5 Doors/Box	39 lbs/box
LRADUL128xGABI	UL Rated Round Access Door 12x8	5 Doors/Box	55.9 lbs/box
LRAD1612xGABI	UL Rated Round Access Door 16x12	2 Doors/Box	25 lbs/box

X = Diameter for round doors