


# Flexible Duct Connector - LA Approved

## Detail

An airtight and flexible vibration isolation connection product.

- Minimizes vibration and noise
- City of Los Angeles Approved: M-150029
- Available with vinyl, neoprene and hypalon.
- Available in Galvanized, Aluminum, Stainless Steel, Galvaneal and PVC
- Meets NFPA 90A & 90B, ASTM
- Fabrics meet NFPA 701
- Airtight and water proof at 10" wg to negative 10" wg

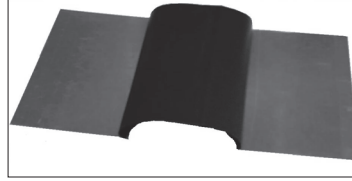


## CONTACT

Office: 888.973.7600

1100 Ashwood Drive  
Suite 1102  
Canonsburg, PA 15317

[www.clward.com](http://www.clward.com)



Power Lock

## Profile

Grade	Composition Metal - Fabric - Metal	Gauge Gauge	Recommended Applications Recommended Applications
Commercial (Option 1)	3" x 3" x 3" LCFC3XGA	24 ga.	Commercial and Industrial
Residential	1 3/4" x 3" x 1 3/4" LRFC3XGA	28 ga.	Residential and Light Commercial
TDC/TDF Commercial	4" x 4" x 4" LCFC4XGA	24 ga.	Commercial and Industrial

X = V for Vinyl, N for Neoprene, H for Hypalon    \*\*Vinyl not available in 4" fabric width\*\*  
Item Code for Vinyl ends with "LA" - LCFC3VGALA

	Vinyl	Neoprene	Hypalon
Base Fabric	Polyester/Polyester	Glass Cloth	Glass Cloth
Color	Black	Black	White
Weight	20 oz./sq. yd.	30 oz./sq. yd.	30 oz./sq.yd.
Tongue Tear	91/60 lbs.	25/20 lbs.	25/20 lbs.
Tensile Strength	295/239 lbs.	475/375 lbs.	475/375 lbs.
Low Temperature	-40°F	-40°F	-4°F
High Temperature	200°F Continuous 250°F Intermittent	200°F	200°F

## Packaging

- 100 ft. per box