


Flexible Duct Connector

Detail

An airtight and flexible vibration isolation connection product.

- Minimizes vibration and noise
- Available in Commercial and Residential
- Available with vinyl, neoprene, hypalon, silicone, and teflon fabrics
- Available in Galvanized, Aluminum, Stainless Steel, Galvaneal and PVC
- Meets NFPA 90A & 90B, ASTM
- Fabrics meet NFPA 701
- Airtight and water proof at 10" wg to negative 10" wg

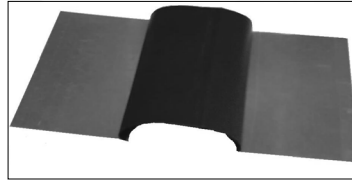

Profile

Grade	Composition Metal - Fabric - Metal	Gauge	Recommended Applications
Commercial (Option 1)	3" x 3" x 3" LCFC3XGA	24 ga. metal	Commercial and Industrial
Commercial (Option 2)	3" x 6" x 3" LCFC6XGA	24 ga. metal	Commercial and Industrial
Residential	1 3/4" x 3" x 1 3/4" LRFC3XGA	28 ga. metal	Residential and Light Commercial
TDC/TDF Commercial	4" x 4" x 4" LCFC4XGA	24 ga. metal	Commercial and Industrial

X = V for Vinyl, N for Neoprene, H for Hypalon, S for Silicone, T for Teflon

	Vinyl-LA	Vinyl	Neoprene
Base Fabric	Polyester/Polyester	Polyester/Polyester	Glass Cloth
Color	Black	Black	Black
Weight	20 oz./sq. yd.	20 oz./sq. yd.	30 oz./sq. yd.
Tongue Tear	35/35 lbs.	65/70 lbs.	40/30 lbs.
Tensile Strength	280 lbs./220lbs.	425/280 lbs.	395/255 lbs.
Low Temperature	-40°F	-40°F	-40°F
High Temperature	200°F	200°F	200°F

	Hypalon	Silicone	Teflon
Base Fabric	Glass Cloth	Fiberglass Fabric	Glass Cloth
Color	White	Silver	Gray
Weight	30 oz./sq.yd.	30 oz./sq. yd.	18 oz./sq. yd.
Tongue Tear	25/20 lbs.	90/90 lbs.	20/20 lbs.
Tensile Strength	475/375 lbs.	372/372 lbs.	410/355 lbs.
Low Temperature	-4°F	-70°F	-100°F
High Temperature	200°F	500°F	600°F

Packaging

- 100 ft. per box




CONTACT


Office: 888.973.7600

1100 Ashwood Drive
Suite 1102
Canonsburg, PA 15317


www.clward.com



Power Lock



Protect Lock



Single Lock

