


# CRD - 50EAX

## Detail

- UL Classified - For use in UL 263 wood truss floor/ceiling and roof/ceiling assemblies rated 1 hour
- UL approved for use in L-587, L-528 and P-556 design
- Incorporates UL 555C evaluated CRD
- 22 gauge one piece frame, Factory installed 26 gauge box
- Collar by others (field cut and installed)
- 165°F fusible link (optional 212°F)
- Standard link (SL) or Easy Access (EA) option
- Ceramic thermal blanket provided on units with blade areas of greater than 84 sq. in.
- Available in a range of sizes from 4" x 8" to 14" x 14"




## CONTACT

Office: 888.973.7600

1100 Ashwood Drive  
Suite 1102  
Canonsburg, PA 15317

[www.clward.com](http://www.clward.com)

## Profile

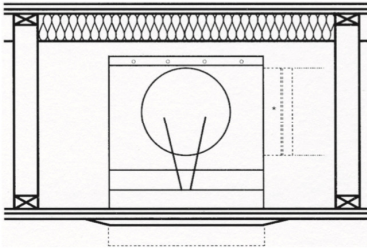

This product meets the requirements for ceiling dampers established by:

**UL Standard 555C**  
**NFPA Standard 90A**  
**ICC Building Codes**

## Item Code Format

5	0	E	A	X	1	2	0	6	G	7	F
---	---	---	---	---	---	---	---	---	---	---	---

Series: CRD 50  
Link: EAX= Easy Access Link, In metal box  
Damper Width  
Damper Height  
G = Galvanized 165° Link  
H = Galvanized 212° Link  
Box Height  
7 = 17"  
4 = 14"  
2 = 12"  
Flange  
F = 5/8" Flange  
F1 = 1" Flange



Manufactured by:



Job Name	
Location	
Architect	
Engineer	
Contractor	