

Fire Damper - 95 Series, Type B

Detail

- UL Classified - 3 Hour Rating, Static
- For use in installations rated 3 hours or greater
- THINLINE Profile (2") 22 gauge frame
- Type B - Blades out of the air stream
- Available for vertical only
- 165°F fusible link (optional 212°F)
- Available in stainless steel
- Vertical dampers are available in single-section sizes from 4" x 4" to 48" x 41"
- Optional 22 gauge sleeve available: 8", 12", 17", 20" or 24"




CONTACT

Office: 888.973.7600

1100 Ashwood Drive
Suite 1102
Canonsburg, PA 15317

www.clward.com

Profile

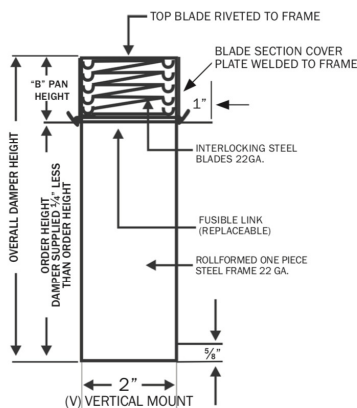

This product meets the requirements for fire dampers established by:

UL Standards 555
NFPA Standard 90A
ICC Building Codes

Item Code Format

| | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 9 | 5 | B | V | 0 | 1 | 2 | 0 | 1 | 2 | G | 2 | 2 | 1 | 2 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|

SERIES:
Fire Damper
75, 65, 05, 95, 77, 99, 61

TYPE:
Fire Damper
A, B, C (round),
R (rectangular), O (oval)
V = Vertical

Damper Width

Damper Height

G = Galvanized
165° Link
H = Galvanized
212° Link
S = Stainless Steel
165° Link
T = Stainless Steel
212° Link

Optional Sleeve
22 = 22 Gauge

Sleeve Length
08 = 8"
12 = 12"
17 = 17"
20 = 20"
24 = 24"



Manufactured by:



| | |
|------------|--|
| Job Name | |
| Location | |
| Architect | |
| Engineer | |
| Contractor | |