

Hang-Fast

CONTACT


Office: 888.973.7600

1100 Ashwood Drive
Suite 1102
Canonsburg, PA 15317

www.clward.com


Detail

- No special tools required
- Meets all mechanical codes
- Dramatically reduces installation time
- Patented
- No welding required
- Available in a variety of sizes
- Independently tested and carries a safety factor of 5:1



Profile

1. **Zinc Housing**- Provides anti-corrosion properties with strength and consistent manufacturing quality.
2. **Stainless Springs**- Type 302 S26. One spring in each channel.
3. **Setting Key**- Entry hole.
4. **Serrated Teeth**- Enables a strong grip on the wire rope without sacrificing wire rope strength. Found in each wire rope channel.
5. **Locking Wedges**- Provides a locking type grip on the wire rope which only allows one way entry.
6. **End-Cap**- Plastic end-cap holds the spring in place.
7. **Setting Key** - Entry hole.

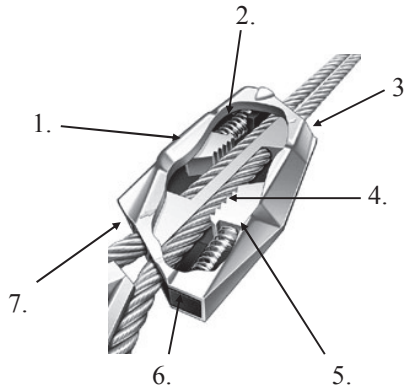

Packaging

Item Code	Description	Qty per Case
HF0105	#1 Hang-Fast 5 ft.	150
HF0110	#1 Hang-Fast 10ft.	100
HF0115	#1 Hang-Fast 15ft.	80
HF0130	#1 Hang-Fast 30ft.	50
HF0205	#2 Hang-Fast 5 ft.	100
HF0210	#2 Hang-Fast 10ft.	100
HF0215	#2 Hang-Fast 15ft.	100
HF0230	#2 Hang-Fast 30ft.	50
HF0305	#3 Hang-Fast 5 ft.	100
HF0310	#3 Hang-Fast 10ft.	50
HF0315	#3 Hang-Fast 15ft.	50
HF0330	#3 Hang-Fast 30ft.	25
HF0415	#4 Hang-Fast 15ft.	20
HF0430	#4 Hang-Fast 30ft.	10
HF0515	#5 Hang-Fast 15ft.	8
HF0530	#5 Hang-Fast 30ft.	6

Hang-Fast

CONTACT


Office: 888.973.7600

1100 Ashwood Drive
Suite 1102
Canonsburg, PA 15317

www.clward.com


Detail

- No special tools required
- Meets all mechanical codes
- Dramatically reduces installation time
- Patented
- No welding required
- Available in a variety of sizes
- Independently tested and carries a safety factor of 5:1



Profile

1. **Zinc Housing**- Provides anti-corrosion properties with strength and consistent manufacturing quality.
2. **Stainless Springs**- Type 302 S26. One spring in each channel.
3. **Setting Key**- Entry hole.
4. **Serrated Teeth**- Enables a strong grip on the wire rope without sacrificing wire rope strength. Found in each wire rope channel.
5. **Locking Wedges**- Provides a locking type grip on the wire rope which only allows one way entry.
6. **End-Cap**- Plastic end-cap holds the spring in place.
7. **Setting Key** - Entry hole.

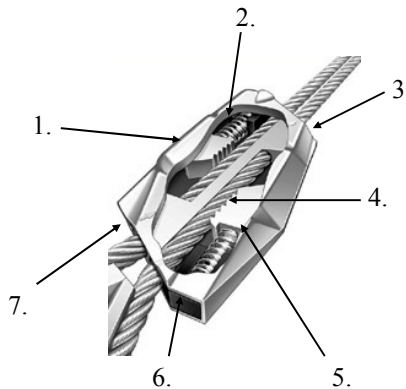

Technical

Hang-Fast

- Housing - Zinc grade ZA2
- Wedges - Hardened sintered steel
- Springs - Stainless steel type 302 S26
- End Cap - UV stabilized homopolymer polypropylene

Wire Rope

- Manufactured from galvanized steel wire rope. Minimum specifications as follows:

Size	Min. Breaking Load	Rope Construction	Tensile Strength
1			
2	572 lbs.	7x7 (6/1)	256,717 psi
3	1,276 lbs.	7x7 (6/1)	256,717 psi
4	3,300 lbs.	7x19 (12/6/1)	256,717 psi
5	4,752 lbs.	7x19 (12/6/1)	256,717 psi

Size	Maximum Load (lbs.)				
	Vertical	15°	30°	45°	60°
1	22	21	18	15	11
2	77	74	66	53	38
3	176	168	151	123	88
4	495	475	425	346	247
5	715	686	614	500	357
Load %	100	96	86	70	50



Hang-Fast

Packaging

Item Code	Description	Qty per Case
HF0105	#1 Hang-Fast 5 ft.	150
HF0110	#1 Hang-Fast 10ft.	100
HF0115	#1 Hang-Fast 15ft.	80
HF0130	#1 Hang-Fast 30ft.	50
HF0205	#2 Hang-Fast 5 ft.	100
HF0210	#2 Hang-Fast 10ft.	100
HF0215	#2 Hang-Fast 15ft.	100
HF0230	#2 Hang-Fast 30ft.	50
HF0305	#3 Hang-Fast 5 ft.	100
HF0310	#3 Hang-Fast 10ft.	50
HF0315	#3 Hang-Fast 15ft.	50
HF0330	#3 Hang-Fast 30ft.	25
HF0405	#4 Hang-Fast 5 ft.	50
HF0410	#4 Hang-Fast 10ft.	25
HF0415	#4 Hang-Fast 15ft.	20
HF0430	#4 Hang-Fast 30ft.	10
HF0505	#5 Hang-Fast 5 ft.	20
HF0510	#5 Hang-Fast 10ft.	10
HF0515	#5 Hang-Fast 15ft.	8
HF0530	#5 Hang-Fast 30ft.	6

CONTACT

Office: 888.973.7600

1100 Ashwood Drive
Suite 1102
Canonsburg, PA 15317

www.clward.com

