

3" Spin In Collar

CONTACT

Office: 888.973.7600

1100 Ashwood Drive
Suite 1102
Canonsburg, PA 15317


www.clward.com

Detail

- Galvanized Steel (ASTM A653 and A924)
- G-60 Galvanized Coating (ASTM A653 and ASTM 90)
- Available in Specialty Metals:
 - Aluminum (ASTM B209 Alloy 3003 Temper H14)
 - 304 Stainless Steel (ASTM A480 2B Finish)
- Pressure Rating: Designed per SMACNA Third Edition 2005 Section 4.8 Figure 4-6 Brand Connections
- Tested to meet SMACNA Leakage Class 3 requirements (Test performed on fittings with no damper)
- Seams sealed with zero VOC integral sealant
- Dimensional Tolerance: $\pm 1/4"$



Profile

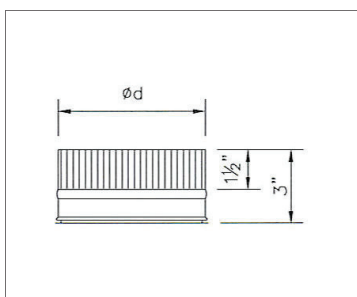

| 3" Spin In | Crimped | Riveted | Diameter | Material | Gauge |
|------------|---------|---------|-----------|-------------------------------------|-------------------|
| 3SI | C | R | 4" to 20" | GA - Galv. S4 - SS304 AL - AL | 26,24 26 32 |

Item Code Example: 3SICR6GA26 = 3" Spin In Collar, 6", Galv., 26 ga,

Packaging

| Size ϕd | Product Availability | | | |
|---------------|----------------------|--------|----------|------|
| | Gauge Availability | | Quantity | |
| | 26 Ga. | 24 Ga. | Carton | Skid |
| 4" | YES | - | 30 | 780 |
| 5" | YES | YES | 30 | 780 |
| 6" | YES | YES | 20 | 600 |
| 7" | YES | YES | 20 | 480 |
| 8" | YES | YES | 20 | 480 |
| 9" | YES | YES | 20 | 480 |
| 10" | YES | YES | 20 | 480 |
| 12" | YES | YES | 10 | 240 |
| 14" | YES | YES | 5 | 120 |
| 16" | YES | YES | 5 | 120 |
| 18" | YES | YES | 5 | 120 |
| 20" | YES | YES | 5 | 120 |