

# 6" Press On Flex Collar

## Detail

- Galvanized Steel (ASTM A653 and A924)
- G-60 Galvanized Coating (ASTM A653 and ASTM 90)
- G-90 available upon request
- Available in Specialty Metals:
  - Aluminum (ASTM B209 Alloy 3003 Temper H14)
  - 304 Stainless Steel (ASTM A480 2B Finish)
- Pressure Rating: Designed per SMACNA Third Edition 2005 Section 4.8 Figure 4-6 Brand Connections
- Tested to meet SMACNA Leakage Class 3 requirements (Test performed on fittings with no damper)
- 4" and 5" Round - 7/8" Flange 6" and up 1" Flange
- Seams sealed with zero VOC integral sealant
- Dimensional Tolerance:  $\pm 1/4"$
- Available with 3/8" continuous rod and hardware




## CONTACT

Office: 888.973.7600


1100 Ashwood Drive  
Suite 1102  
Canonsburg, PA 15317

[www.clward.com](http://www.clward.com)

## Profile



Actual diameter is  $-1/8"$  to allow for flex duct connection.

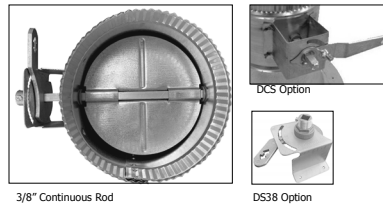

Scoop	6" Press On Collar	Option	Flex	Crimped	Diameter	Material	Gauge	Option	G 90
S	6PO	S15, S2 = 1.5" or 2" Stand off	F	C	4" to 20"	GA - Galv. S4 - SS304 AL - AL	26,24 26 32	DS= Damper DCS= 3/8" Rod and Damper DS38 = 3/8" Rod, Sure Loc Handle	90

Item Code Example: 6POS2CR6GA26DS = 6" Press On, 2" Stand-off, 6", Galv., 26 ga, w/Damper

## Packaging

Size ød	Product Availability			
	Gauge Availability		Quantity	
	26 Ga.	24 Ga.	Carton	Skid
4"	YES	-	25	300
5"	YES	YES	25	300
6"	YES	YES	20	240
7"	YES	YES	20	240
8"	YES	YES	20	240
9"	YES	YES	10	120
10"	YES	YES	10	120
12"	YES	YES	10	120
14"	YES	YES	5	60
16"	YES	YES	5	60
18"	YES	YES	5	60
20"	YES	YES	2	24

Dampened fittings are available with 1.5" or 2" Stand-Off.