

# Snap Lock Pipe (Button Lock)

## Detail

- Galvanized Steel (ASTM A653 and A924)
- G-60 Galvanized Coating (ASTM A653 and ASTM 90)
- G-90 available upon request
- Available in Specialty Metals:
  - .025 Aluminum (ASTM B209 Alloy 3003 Temper H14)
  - 304 Stainless Steel (ASTM A480 2B Finish)
- Aluminum and Stainless Steel are 48" Lengths
- Pressure Rating: -1" w.g. - +2" w.g.
- SPB - Button Lock Pipe meets SMACNA RL-8
- Dimensional Tolerance:  $\pm 1/4"$




## CONTACT

Office: 888.973.7600

1100 Ashwood Drive  
Suite 1102  
Canonsburg, PA 15317  
Can

[www.clward.com](http://www.clward.com)

## Profile

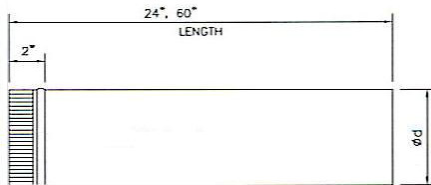

Pipe Length	Snap Pipe	Button Lock	Pipe Diameter	Material	Gauge	G90
24,60 48 - SS and AL only	SP	B	4" to 14"	GA - Galv. S4 - SS 304 AL - Alum.	28,26,24 26 25	90

Item Code Example: 60SPB6GA26 = 60" Snap Lock Pipe, Button Lock, 6", Galv., 26 ga.

## Packaging

Gauge & Lock Availability - 24" lengths					
Size	Gauge			Quantity	
	28	26	24	Bundle	Skid/Rack
4"	YES	YES	-	10	720
5"	YES	YES	YES	10	490
6"	YES	YES	YES	10	360
7"	YES	YES	YES	10	220
8"	YES	YES	YES	10	160
9"	YES	YES	YES	10	140
10"	YES	YES	YES	10	120
12"	YES	YES	YES	10	90
14"	-	YES	YES	10	70

Gauge & Lock Availability - 60" lengths					
Size	Gauge			Quantity	
	28	26	24	Bundle	Skid/Rack
4"	YES	YES	-	5	355
5"	YES	YES	YES	5	245
6"	YES	YES	YES	5	150
7"	YES	YES	YES	5	100
8"	YES	YES	YES	5	100
9"	YES	YES	YES	5	80
10"	YES	YES	YES	5	60
12"	YES	YES	YES	5	45
14"	-	YES	YES	5	30