

# Snap Lock Pipe (Reeves Lock)

## CONTACT

Office: 888.973.7600

1100 Ashwood Drive  
Suite 1102  
Canonsburg, PA 15317


[www.clward.com](http://www.clward.com)

## Detail

- Galvanized Steel (ASTM A653 and A924)
- G-60 Galvanized Coating (ASTM A653 and ASTM 90)
- G-90 available up request
- Available in Specialty Metals:
  - .032 Aluminum (ASTM B209 Alloy 3003 Temper H14)
  - 304 Stainless Steel (ASTM A480 2B Finish)
- Aluminum and Stainless Steel are 48" Lengths
- Pressure Rating: -1" w.g. - +2" w.g.
- SPR - Reeves Lock Pipe meets SMACNA RL-6A&B
- Dimensional Tolerance:  $\pm 1/4"$



## Profile

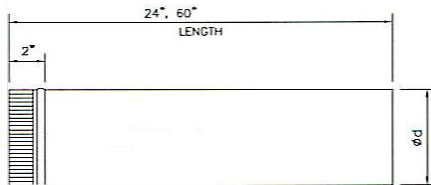

Pipe Length	Snap Pipe	Reeves Lock	Pipe Diameter	Material	Gauge	G 90
24,60	SP	R	16" to 24"	GA - Galv.	24	90

Item Code Example: 60SPR18GA24 = 60" Snap Lock Pipe, Reeves Lock, 18", Galv., 24 ga.

## Packaging

Reeves Lock Snap Pipe Availability - 24"			
Size	Quantity		
	Reeves	Bundle	Skid/Rack
16"	YES	10	60
18"	YES	10	50
20"	YES	10	50
22"	**	**	**
24"	**	**	**

Reeves Lock Snap Pipe Availability - 60"			
Size	Quantity		
	Reeves	Bundle	Skid/Rack
16"	YES	5	25
18"	YES	5	20
20"	YES	5	20
22"	**	**	**
24"	**	**	**

\*\* - Consult Factory