

# 3" Tabbed Collar

## CONTACT

Office: 888.973.7600

1100 Ashwood Drive  
Suite 1102  
Canonsburg, PA 15317


[www.clward.com](http://www.clward.com)

## Detail

- Galvanized Steel (ASTM A653 and A924)
- G-60 Galvanized Coating (ASTM A653 and ASTM 90)
- Available in Specialty Metals:
  - Aluminum (ASTM B209 Alloy 3003 Temper H14)
  - 304 Stainless Steel (ASTM A480 2B Finish)
- Pressure Rating: Designed per SMACNA Third Edition 2005 Section 4.8 Figure 4-6 Brand Connections
- Tested to meet SMACNA Leakage Class 3 requirements (Test performed on fittings with no damper)
- Seams sealed with zero VOC integral sealant
- Dimensional Tolerance:  $\pm 1/4"$



## Profile

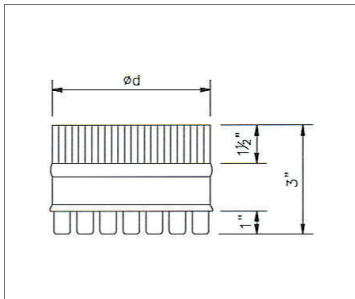

3" Tabbed	Crimped	Riveted	Diameter	Material	Gauge
3SC	C	R	4" to 20"	GA - Galv. S4 - SS304 AL - AL	26,24 26 32

Item Code Example: 3SICR6GA26 = 3" Tabbed Collar, 6", Galv., 26 ga,

## Packaging

Size $\phi d$	Product Availability			
	Gauge Availability		Quantity	
	26 Ga.	24 Ga.	Carton	Skid
4"	YES	-	30	780
5"	YES	YES	30	780
6"	YES	YES	20	600
7"	YES	YES	20	480
8"	YES	YES	20	480
9"	YES	YES	20	480
10"	YES	YES	20	480
12"	YES	YES	10	240
14"	YES	YES	5	120
16"	YES	YES	5	120
18"	YES	YES	5	120
20"	YES	YES	5	120